


SPECIFICATION SHEET FOR ANTI-CONDENSATION HEATERS

The Anti-condensation heater consists of resistance wire insulated by suitable “F” class insulation material.

The dimensions are as per the below drawing.

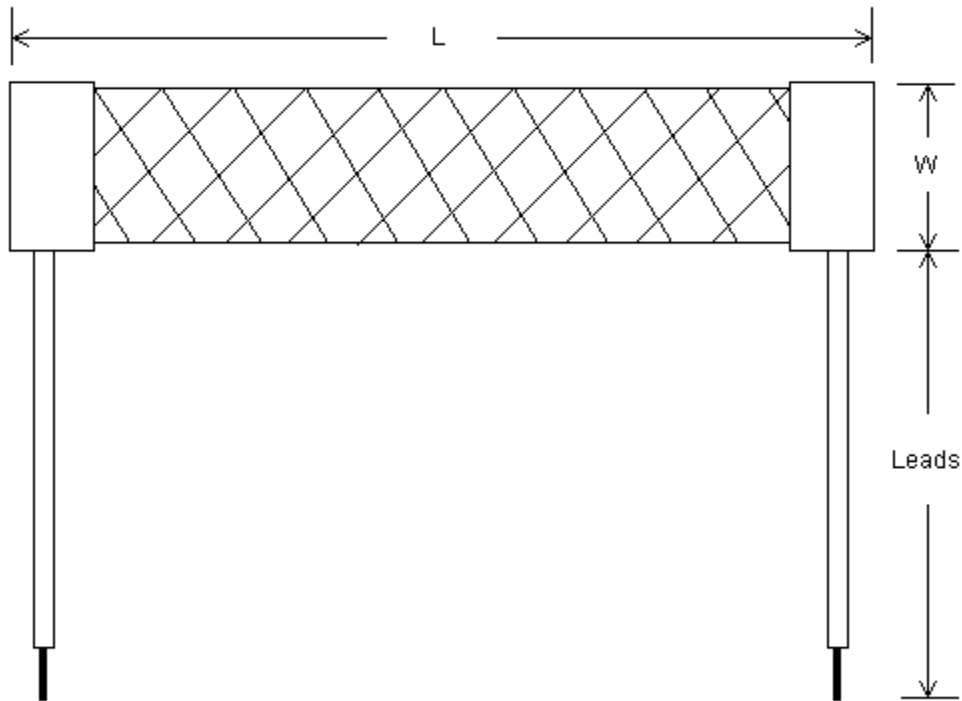

Details.

Power rating (W)	Voltage (V)	L (mm)	W (mm)	Leads (mm)
8	110	203	16	500
8	220	203	16	500
22	110	305	16	500
25	220	305	16	500
27	110	432	16	500
26	220	432	16	500
21	110	686	16	500
21	220	686	16	500
40	110	686	16	500
40	220	686	16	500
25	110	762	16	500
26	220	762	16	500

39	110	1016	16	500
42	220	1016	16	500
50	110	1067	16	500
54	220	1067	16	500
67	110	1473	16	500
65	220	1473	16	500
103	110	1702	16	500
99	220	1702	16	500

Lead Wire.

AWG 24 (7/32) or AWG 22 (19/34). PTFE (Teflon) insulated, Flexible Tinned Copper wire.

Tolerance in Power Rating : $\pm 5\%$

Insulation Resistance : Min. 10 Mega Ohm

High Voltage Test : 2 KV for 1 minute